


Quick Installation Guide

GS-7316 | 16-Port Gigabit Ethernet Switch



Understanding your Switch


This switch contains LEDs to show the activities and status of the ports, including the POWER LED and LINK/ACT LEDs. Please refer to the front panel of the switch for the positions of the LEDs:

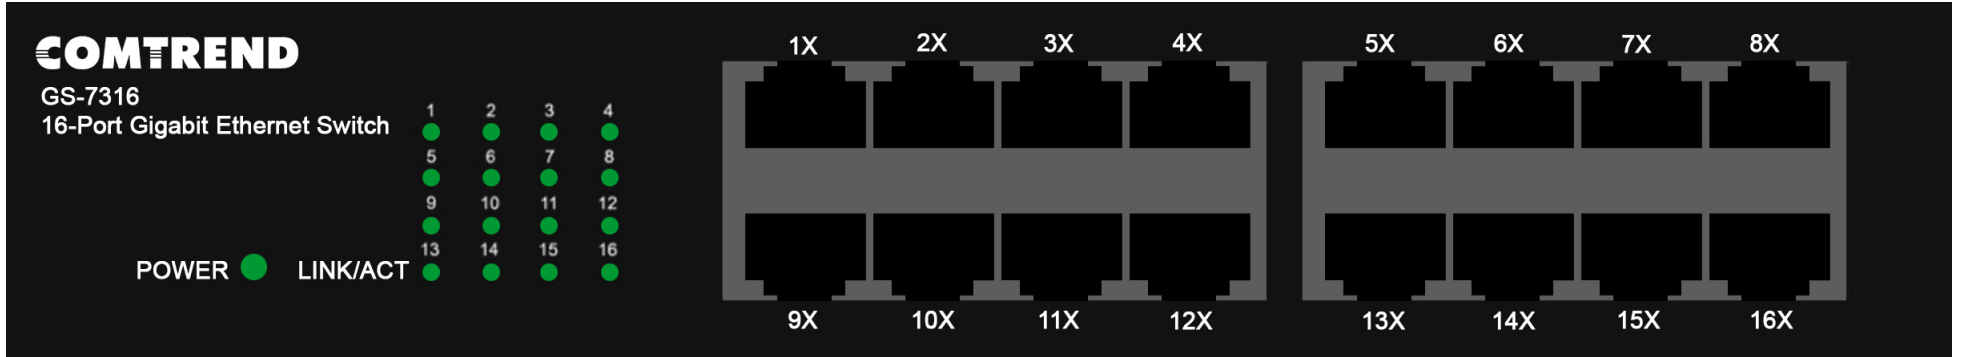

Look at the following table for the description of the LEDs:

LED	Status	Operation
POWER	Steady Green	The switch is powered on
	Off	The switch is powered off
LINK/ACT 1-16	Steady Green	1000Mbps connected
	Blinking	Data transmitting
	Off	Port disconnected or link fail


Rear Panel

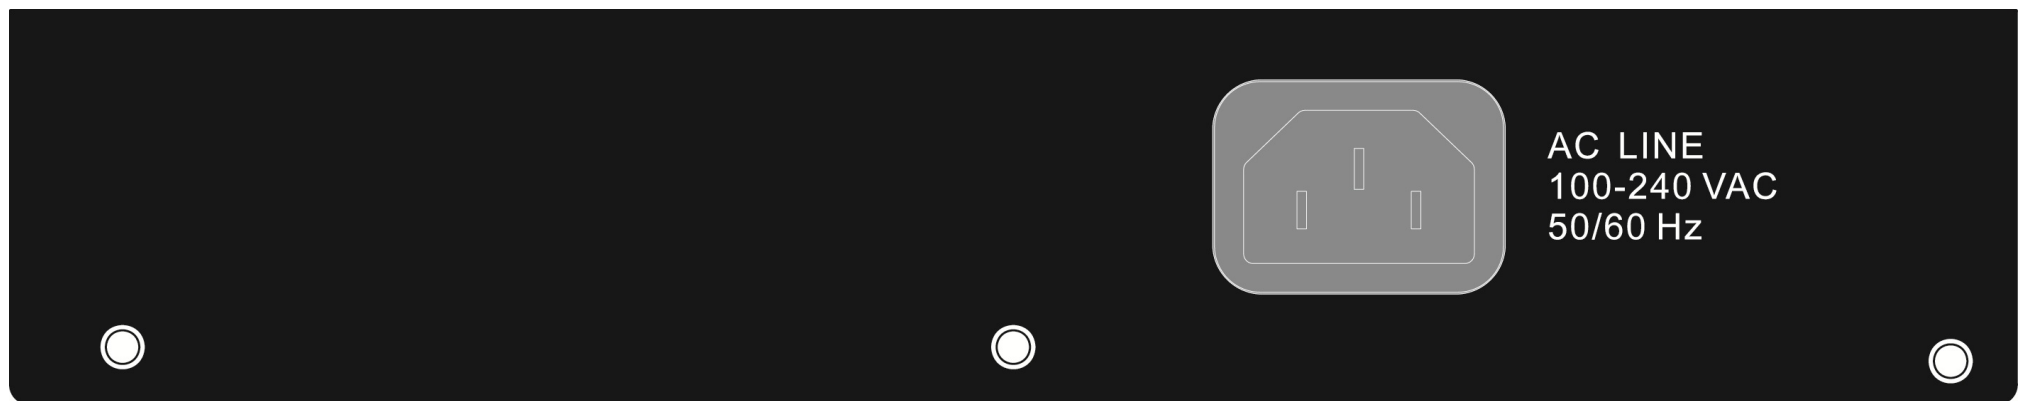

B

Basic Setup

1. Power On the Switch by plugging it into the power outlet. The POWER LED turns on when the switch is receiving power.
2. Using an Ethernet cable, connect your Network device (Modem, Router or Access Point) to any port on the switch.
3. Connect the Switch to other Internet-Enabled Devices.

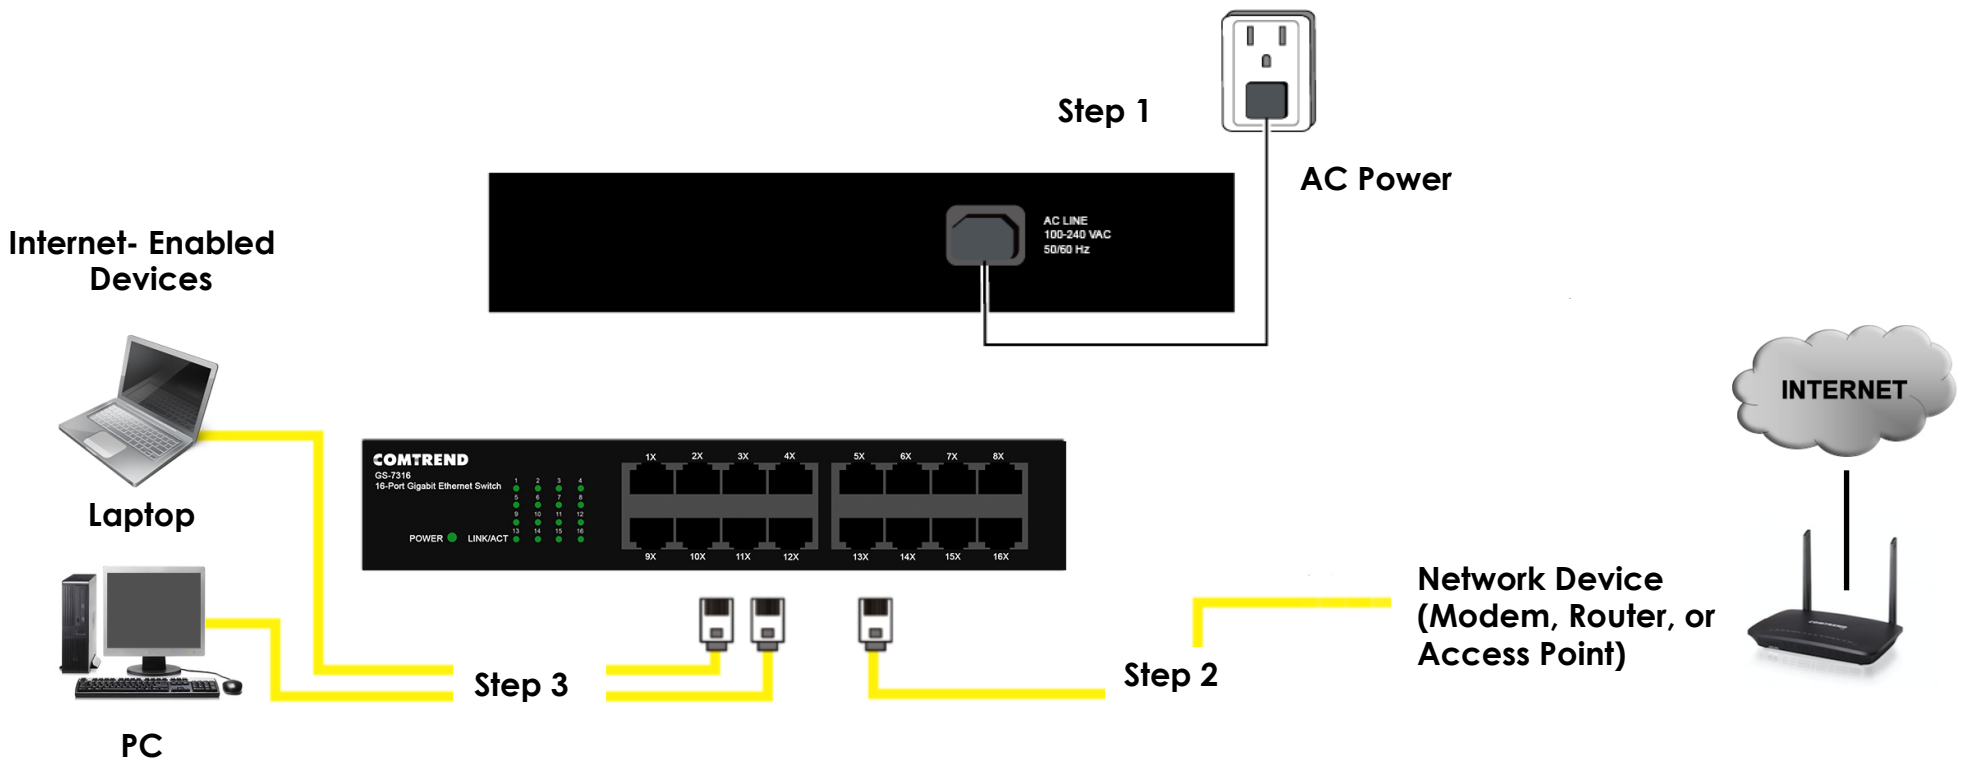

C

You Have Successfully Installed Your Gigabit Ethernet Switch

D

Troubleshooting

The following information should help you diagnose basic setup or installation problems.

1) POWER Indicator is OFF: If the POWER LED goes off, please make sure that your power outlet is working properly (perhaps by testing with another device). Then plug in your GS-7316 again. If the Power Indicator does not light up, please contact your equipment supplier for further information.

2) NETWORK LED is OFF: If a LAN LED fails to light up, check that the LAN port of the Switch is connected firmly to the LAN port of the other device. To check the condition of the Ethernet cable, use another cable to test the same connection.

FOR MORE HELP: For instructions on advanced features, FAQ, etc., please visit our product online at:

<http://us.comtrend.com>

For more information:

YouTube Channel: <https://www.youtube.com/user/ComtrendConnection>

Facebook: <https://facebook.com/Comtrend>

Website: <http://us.comtrend.com/>

Support: Visit our website or call 1-877-COMTREND (1-877-266-8736)

