

# COMTREND

## Quick Installation Guide

GS-7405 | 5-Port Gigabit Ethernet Smart-Lite Switch

### I Product Information

---

#### I-1. Package Contents



**1**




**2**



**3**

**4**



**5**



**1.** GS-7405 Switch

**2.** QIG

**3.** Manual CD

**4.** Power Cable


**5.** 4 x Foot Pads

## I-2. Hardware Overview

### Front Panel

The front panel of the switch consists of:


- A Series of LED Indicators

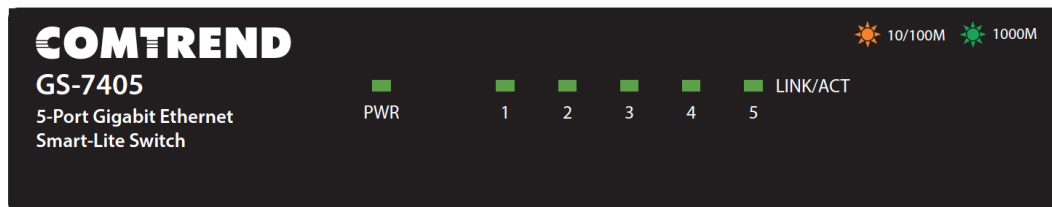

### Rear Panel

The rear panel of the switch consists of:

- 5 x 10/100/1000Mbps RJ-45 Ports
- AC Power Connector
- Reset Button

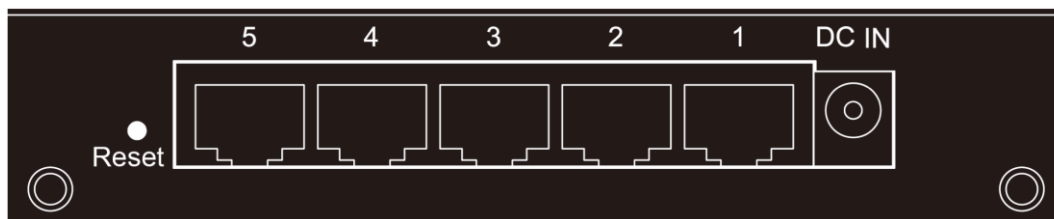

### I-3. LED Indicator

PWR:

LED Status	Mode	Description
Green	On	Power on
Off	Off	Power off or fail

Link/ACT:

LED Status	Mode	Description
Green	On/Blinking	1000Mbps connected/data transmitting
Amber	On/Blinking	10/100Mbps connected/data transmitting
Off	Off	Disconnected or fail

### I-4. Desktop Installation

Install the switch on a desktop by attaching the cushioning rubber feet to the bottom corners of the switch to protect against external vibration. Allow adequate space for ventilation between the device and any objects around.






## II-1. Switch to End Device

1. Connect the switch to local power with the included power cable.
2. Use a standard Cat 5/5e Ethernet cable to connect the switch to end devices as shown below. Switch ports will automatically adjust to the link rate of the device to which it's connected.


Optionally, any port can be used to uplink to an existing network.

### Application Diagram

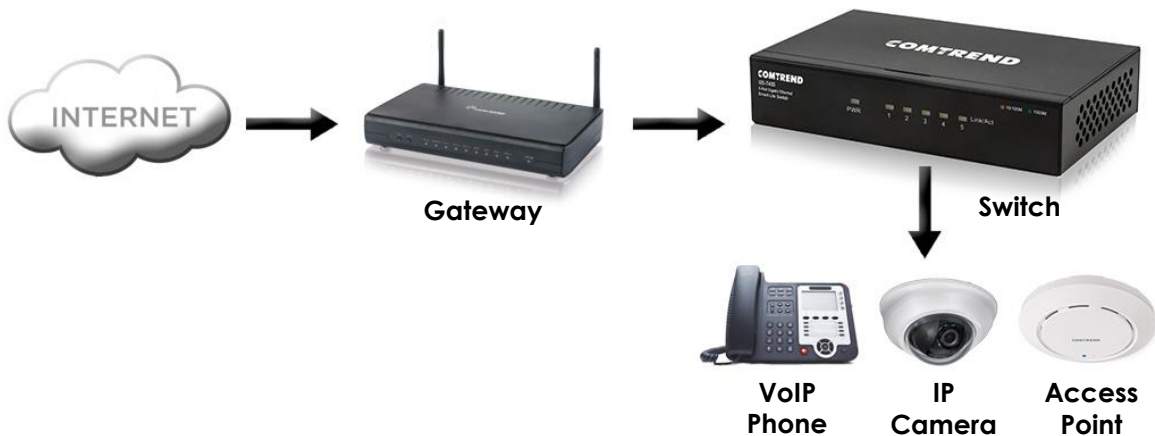

## II-2. Login

1. Open a web browser and go to the switch's IP address.
2. Enter the access point's default IP address **192.168.169.1** into the URL bar of a web browser.

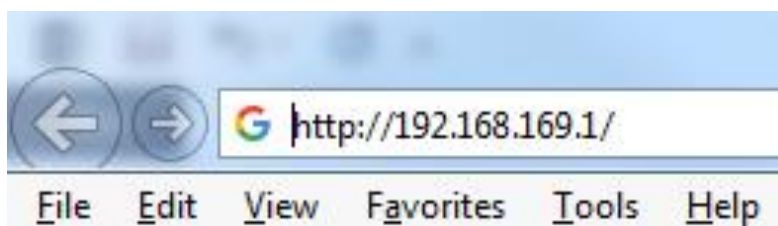


You will be prompted for a username and password. Enter the default username "admin" and the default password "admin".



The image shows the COMTREND User Login page. The header features the COMTREND logo on the left and "User Login" on the right. The main content area contains three input fields: "User name" with the value "admin", "Password" with masked characters "\*\*\*\*", and "Language" set to "English". A "Login" button is positioned below the password field. At the bottom left, there is a copyright notice: "© All rights reserved".

3. You will arrive at the switch configuration window as shown below:

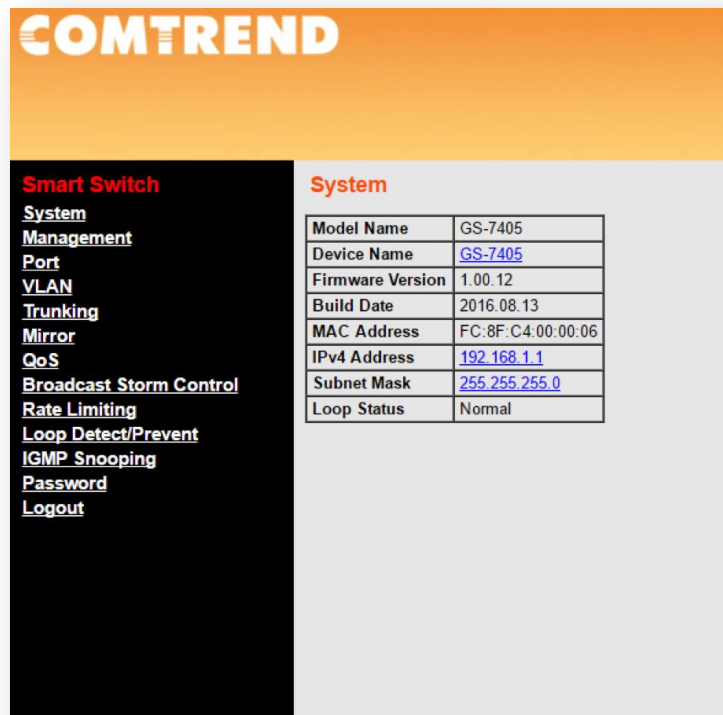

The image displays the COMTREND Smart Switch configuration window. The top header is orange with the COMTREND logo. Below the header, there is a navigation menu on the left and a "System" configuration table on the right.

**Smart Switch**

- [System](#)
- [Management](#)
- [Port](#)
- [VLAN](#)
- [Trunking](#)
- [Mirror](#)
- [QoS](#)
- [Broadcast Storm Control](#)
- [Rate Limiting](#)
- [Loop Detect/Prevent](#)
- [IGMP Snooping](#)
- [Password](#)
- [Logout](#)

**System**

Model Name	GS-7405
Device Name	<a href="#">GS-7405</a>
Firmware Version	1.00.12
Build Date	2016.08.13
MAC Address	FC:8F:C4:00:00:06
IPv4 Address	<a href="#">192.168.1.1</a>
Subnet Mask	<a href="#">255.255.255.0</a>
Loop Status	Normal



Your Device is Now Connected!

---

**FOR MORE HELP:** For instructions on advanced features, FAQ, etc., please visit our online Product Webpage.

**For more information:**

YouTube: <https://www.youtube.com/user/ComtrendConnection>

Facebook: <https://facebook.com/Comtrend>

Website: <http://us.comtrend.com/>

Support: Visit our website or call 1-877-COMTREND (1-877-266-8736)

